Land Management:

Role of Land drainage/Water table control in GHG Mitigation

Pat Tuohy 01/05/2020



An Analysis of Abatement Potential of Greenhouse Gas Emissions in Irish Agriculture 2021-2030

Prepared by the Teagasc Greenhouse Gas Working Group

Gary J. Lanigan & Trevor Donnellan (eds.)

Authors:

Gary Lanigan, Trevor Donnellan, Kevin Hanrahan, Carsten Paul, Laurence Shalloo, Dominika Krol, Patrick Forrestal, Niall Farrelly, Donal O'Brien, Mary Ryan, Pat Murphy, Barry Caslin, John Spink, John Finnan, Andy Boland, John Upton, Karl Richards

June 2018

Teagasc, Oak Park, Carlow







Tuarascáil ón gComhchoiste um Ghníomhú ar son na hAeráide An tAthrú Aeráide: Comhdhearcadh Traspháirtí don Ghníomhú Márta 2019

> Report of the Joint Committee on Climate Action Climate Change: A Cross-Party Consensus for Action March 2019





2

Role of Land Drainage/ Water table control

- Teagasc GHG Working Group-MACC
 - Measure 10: Draining Wet Mineral Soils
 - » Measure 7: Extended Grazing

- Measure 17: Water Table Manipulation of <u>Organic Soils</u>
 - » Also referred to as Rewetting



Mineral or organic soils?

- Mineral soils are derived from mineral matter-sand, silt, clay (+ larger particles)
 - Little organic matter (< 10%)





Mineral or organic soils?

<u>Organic</u>

- **Peats** possess an organic layer with at least 20% Organic Carbon (OC) and a minimum thickness of 40 cm.
- Histic soils have a peaty (>20% OC) (O) horizon that has a thickness of 7.5 or more







Mineral or organic soils?

Organo/mineral


- **Humic soils** contain an A horizon with significantly more organic matter, than mineral matter.
- Minimum thickness is 7.5 cm and OC content is lower (depending on the clay content)







Mineral or Organic soils?

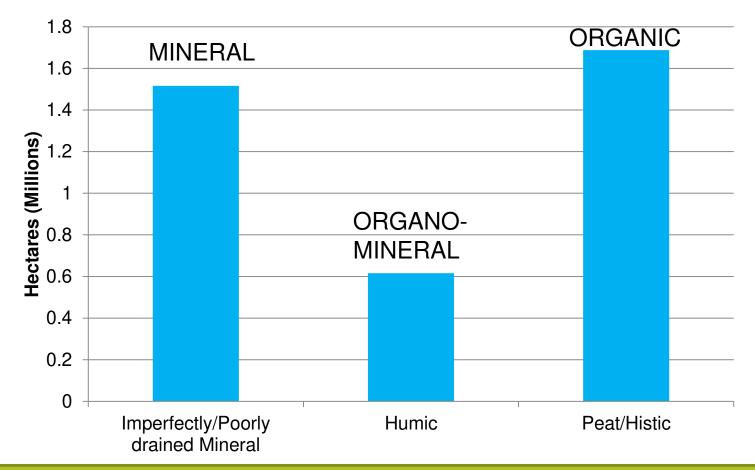

Mapped within Irish Soil Information System Current work using satellite imagery to refine further



Role of Land Drainage

- Measure 10: Draining Wet Mineral soils
- "one-third of Irish land area can be classified as poorly draining...Assuming that one-third of this area (i.e. 10% of total grassland area) was drained by 2030"
 - Nature of Measure: Reducing N₂O Emissions
 - Cost € per t/CO₂ Eq: €16.2
 - Mitigation Mt CO₂ Eq: 0.197
 - Cost €M: €6.1



Role of Land Drainage

- Measure 7: Extended Grazing
- "production systems that either require improved drainage or could benefit from on-off grazing...The measure was assessed on 20% of grassland area"
 - Nature of Measure: Production Efficiency
 - Cost € per t/CO₂ Eq: -€96
 - Mitigation Mt CO₂ Eq: 0.066
 - Cost €M: -€6.3



MACC Curve


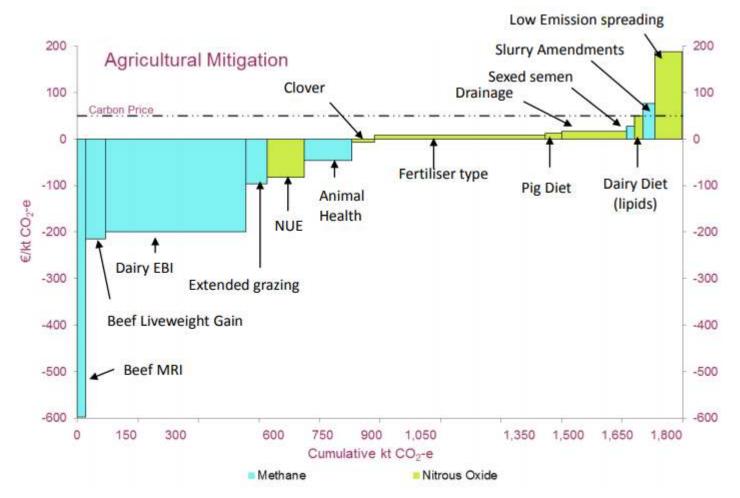


Figure 3.1: Marginal Abatement Cost Curve for agriculture for 2021-2030 (methane and nitrous oxide abatement). Values are based on linear uptake of measures between the years 2021-2030 and represent the mean yearly abatement over this period. Dashed line indicates Carbon



Heavy Soils Programme Farms



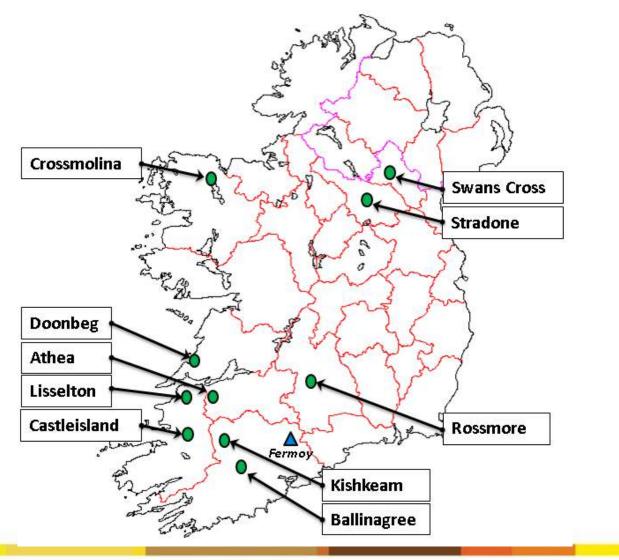



Types of drainage system


- The depth and type of drain to be installed depends entirely on the interpretation soil characteristics.
- Two principle types are distinguished:
 - Groundwater drainage system: A network of deeply installed piped drains exploiting permeable layers
 - Shallow Drainage system: Where soil is heavy and infiltration of water is impeded at all depths and permeability needs to be improved





Groundwater Drainage System

- A Groundwater drainage system is a network of field drains collecting groundwater which can move through soil layers of high permeability
- They work by exploiting the natural capacity for movement of water at a certain depth in certain soils
- By "tapping" into this natural capacity for water movement the system works by lowering the watertable and reducing the amount of water stored in the soil

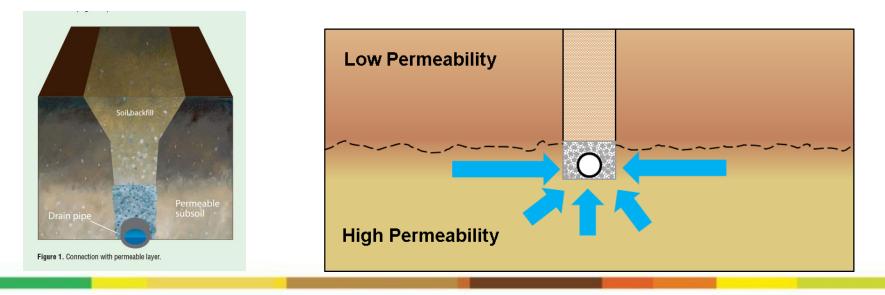



Shallow Drainage System


- A shallow drainage system is a network of field drains in tandem with surface disruption techniques which promote water infiltration and drainage
- Used where soil permeability is low at all depths and aims to introduce new pathways for water movement in the soil
- Methods include: Mole drainage, gravel mole drainage, sub-soiling (pan busting) and land forming





Land Drainage Research/Design

Drainage System monitoring

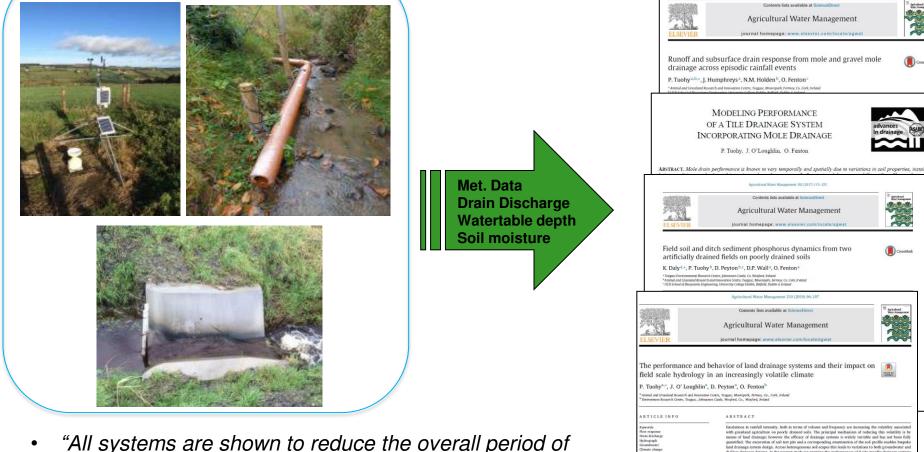

"All systems are shown to reduce the overall period of waterlogging and improve surface conditions"

> easasc AGRICULTURE AND FOOD DEVELOPMENT AUTHORITY

aced the overall period

ase designs), during a high rainfall period (01/10/2015-31/05/


rainage designs generally maintained a deeper mean water table depth (0.82 m) than shall uring the study period. The functional capacity of each land drainage system was inhe comparison of such systems highlights contrasting behaviors of individual drainage systems and drainage desig spes, which is dictated largely by the hydraulic capacity of the soil within their catchment and their conhvater versus perched water). All systems red

waterlogging and improved the conditions for both the production and utilization of the grasslands they drait although temporal variations in agronomic parameters are likely to be more pronounced in shallow designs.

d drainage system design. Across he ge designs. In the present study we en

Dissemination, Extension, Training


















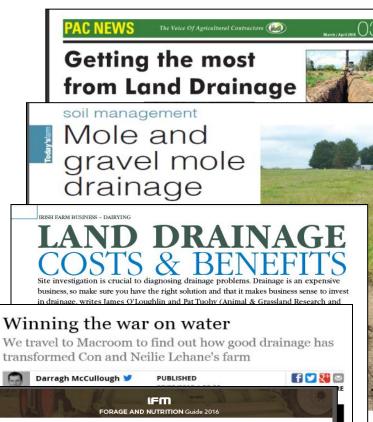

Pat Tuohy, Owen Fenton and James O' Loughlin, Teagas LAND DRAINAGE

GUIDELINES

Approximately 49.5% (3.4 million hectares) of the total land area of Ireland is classified as 'marginal land', which is affected by natural limitations related to its soil, topography, relief and climate. The major limitation is its poor drainage status, and much is in need of artificial drainage if its productivity is to be improved. In wet years poorly drained soils may never dry out as persistent rainfall maintains high soil moisture content

Grass yields are limited due to the adverse effect of excess water and a lack of air at rooting depth, which limits plant respiration and growth. In cases of prolonged water-logging, plants will eventually die due to a lack of oxygen in the root zone. Furthermore, waterlogged soils are impassable to machinery and livestock traffic for long periods, due to high soil moisture content and reduced soil strength. This reduces the number of grazing days and hinders silage harvesting, thus introducing highe

- Low permeability in the subsoil (or a layer of the subsoil);
- High water table due to low-lying position and poor/ poorly-maintained outfall; Upward movement of water from seepage and
- springs. OBJECTIVES OF LAND DRAINAGE To achieve effective drainage, the works will have to

Role of Land Drainage

- Measure 17: Water table manipulation of organic soils
- "if drainage was stopped completely and natural water table conditions were restored (on) 40,000 Ha of rewetted grassland"
 - Nature of Measure: Rewetting of 40,000 Ha of Organic grassland soils
 - Cost € per t/CO₂ Eq: €10.9
 - Mitigation Mt CO₂ Eq: 0.44
 - Cost €M: €4.84



MACC Curve


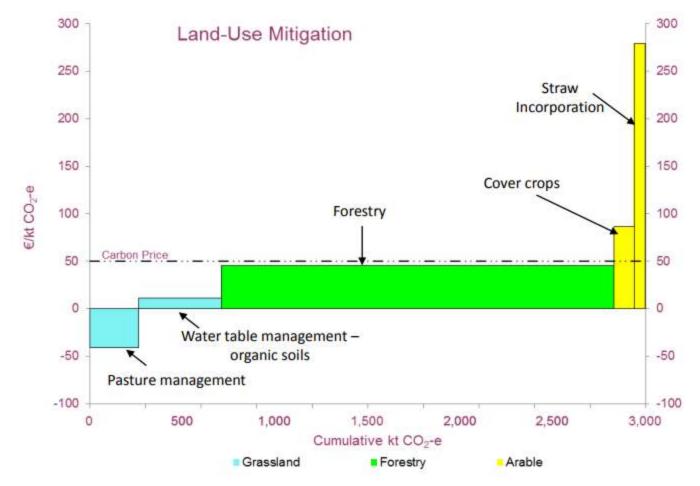


Figure 3.2: Marginal Abatement Cost Curve for agriculture for 2021-2030 (carbon sequestration associated with land management and landuse change). Values are based on linear uptake of measures between 2021-2030. Dashed line indicates Carbon cost of €50 per tonne CO₂.



GHG emissions from Carbon rich soils in Ireland drained for agriculture

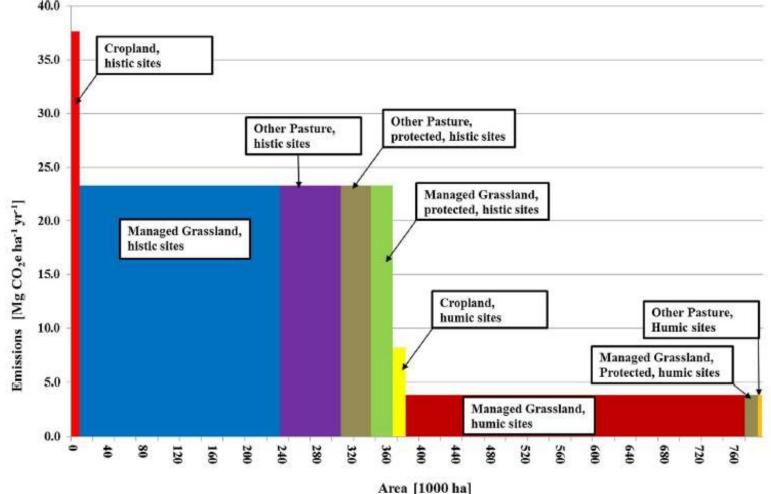

Paul et al., 2018 "modelling was based on an extreme drainage situation with a very high water table before drainage and a very low water table afterwards. Less extreme hydrological situations may result in lower emissions."

Peat-Land Area


 Characterisation of peat areas under agricultural management are required to identify suitable areas for rewetting

Peatland category	hectares
Natural peatlands	269,270 ^a
Cutover peatlands (affected by domestic turf-cutting) 612,38	
Afforested peatland	301,700 ^b
Farmed peatland (grassland and cropland)	295,000 ^c
Industrial cutaway peatlands	70,000 ^d
Rehabilitated cutaway	18,000

(O' Sullivan et al. 2018)

 "The (assumed) total area of drained (peat)/histic soils was 370,000 ha (under agriculture)" (GHG-MACC)"



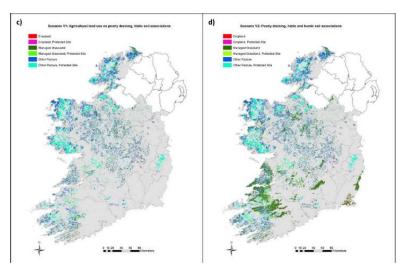

Contents lists available at ScienceDirect
Environmental Science and Policy
journal homepage: www.elsevier.com/locate/envsci

Assessing the role of artificially drained agricultural land for climate change mitigation in Ireland




CrossMark

Carsten Paul^{a,b,*}, Réamonn Fealy^c, Owen Fenton^a, Gary Lanigan^a, Lilian O'Sullivan^a, Rogier P.O. Schulte^{a,d}

349639363454	Contents lists available at ScienceDirect	I Land Use Policy
201	Land Use Policy	Land Use Policy
ELSEVIER	journal homepage: www.elsevier.com/locate/landusepol	

Functional Land Management for managing soil functions: A case-study of the trade-off between primary productivity and carbon storage in response to the intervention of drainage systems in Ireland


L. O'Sullivan^{a,b}, R.E. Creamer^c, R. Fealy^d, G. Lanigan^b, I. Simo^c, O. Fenton^b, J. Carfrae^e, R.P.O. Schulte^{c,*}

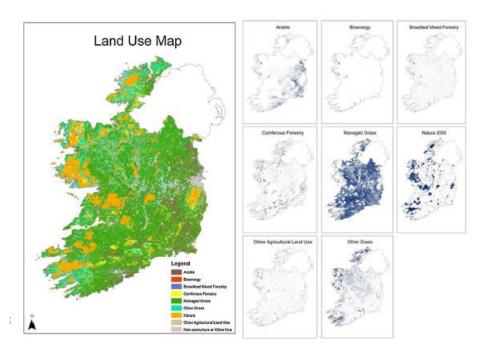

Produced maps of:

- Land Use
- Soil drainage class



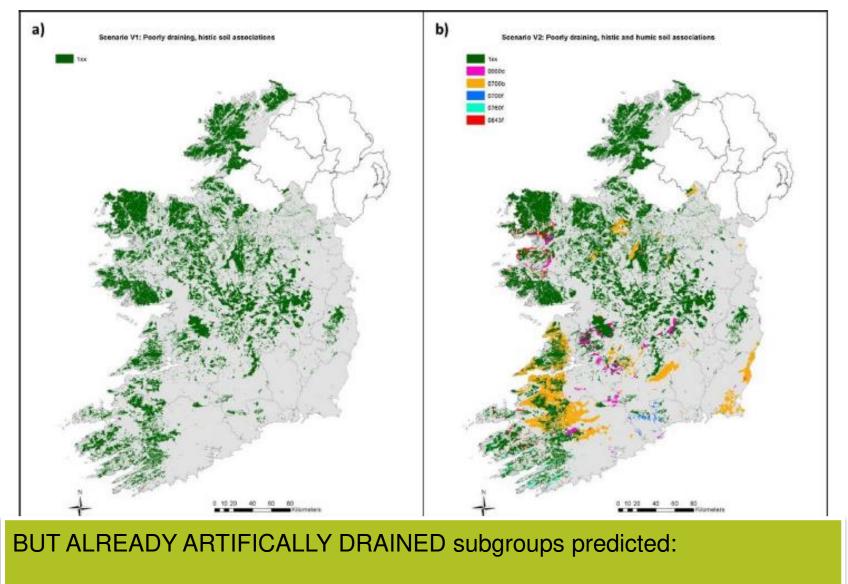

370,000 ha of histic soils drained (assumed) 426,000 ha of humic soils drained (assumed)



Paul et al., 2018




- The drainage of mineral soils is positive (in terms of GHG emissions) and also contributes towards extended grazing
- Annual emissions from drained "Carbon-Rich" soils are **estimated** up to:
 - 8.7 Tg CO₂e from histic soils (**Organic**)
 - 1.8 Tg CO₂e from humic soils (Organo-Mineral)

1 Tg (Teragram) = 1 million metric tonnes

- National policy recognizes the importance of preserving organic (histic) and humic soils' carbon stock, but requires data that is not readily available.
- We do not know the area of drained organic soils in Ireland
- We do not know how much has already reverted to "undrained" conditions
- Further research will explore the site suitability and cost effectiveness, as well as trade-offs and co-benefits of rewetting.



Summary

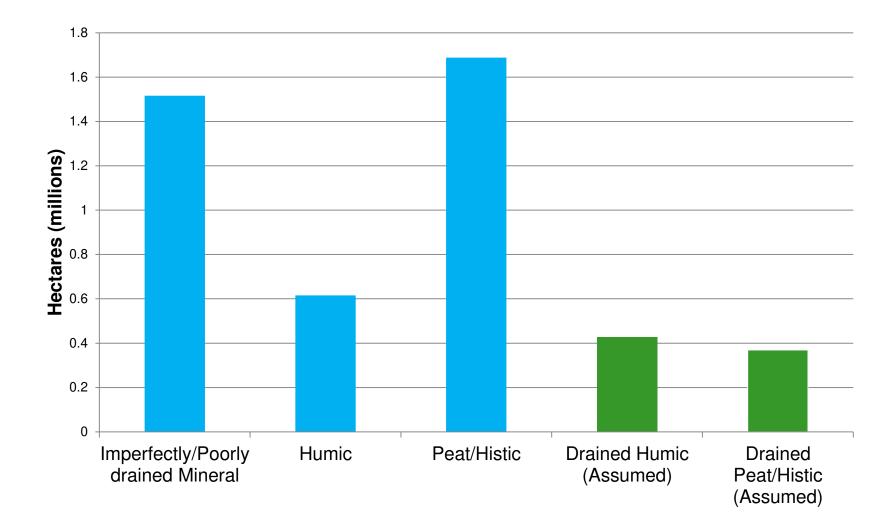



Questions?

patrick.tuohy@teagasc.ie

